

CS 170

Efficient Algorithms and Intractable Problems

Lecture 1: Logistics, Introduction, Arithmetic

Nika Haghtalab and John Wright

EECS, UC Berkeley

(Some slides and material are inspired by courses taught by Nelson, Raghavendra, Tal, Vazirani, Haghtalab, Wright (UC Berkeley) and Wootters (Stanford))

Today's Plan

Introductions

- Who are we?
- Who are you?
- Why are we here?

Course Overview

- Course Goals and overview
- Logistics

Arithmetic!

- Can we add and multiply?
- Can we do them fast?

Who are you?

Mostly sophomore (~35%) and juniors (~35%), and senior (~23%)

Studying

- Applied Math
- Architecture
- Bioengineering
- Business Administration
- Chemical Biology
- Computer Science
- Data Science
- EECS
- Economics
- Environmental Sciences
- IEOR
- Cognitive Science
- Genetics & Plant Biology
- Mathematics
- Mechanical Engineering
- Music
- Philosophy
- Physics
- Statistics
- ...

Who are we?

Instructors



Prof. Nika Haghtalab



Prof. John Wright

Teaching Assistants



David



Mark



Yen-Hsiang



Jaewon



Subhash

Tutors & Readers



Alexander



Cris



Julian



Kepha



Pooja



Ryan



William



Bhargav



Spencer



Janice

Why are we all here?

You need an **upper div credit ...**

Algorithms are **fundamental and useful.**

Algorithms are **fun!**



r/berkeley ·
by rtwentyseven

Why is CS170 Impo



headband_darg ·

you develop core algorithmic problem
applicable to many different areas of CS.

↑ 20 ↓ · Reply



r/berkeley ·
by ExtraCaramel8

is CS170 necessary for recruiting?



buzzbannana ·

Personally think you should take 170 because it is more of a core class.

↑ 6 ↓ · Reply · Share · ...

Overall Thoughts: I really liked 170. Walking away from the class, I feel like I truly understand a lot of the algorithms and why they worked that I didn't quite understand from 61B and grinding LeetCode. Definitely a must-take class if you are a CS major.

Course Goals

Design and analyze algorithms

In this course you will learn:

- **Design:** Acquire an **algorithmic toolkit**
- **Analysis:** Learn to **think analytically** about algorithms
- **Understand limitations:** Understand algorithmic **limitations**
- **Communication:** Learn to **formalize your thoughts** and **communicate clearly** about algorithms

Fundamental Questions about Algorithms



Precise definitions
Rigorous Proofs
Corner cases
Very detailed

Detail-oriented

Does it work?

Is it fast?

Can we do better?



Big picture
Intuitive understanding
Broader connections
Sometimes handwavy

Bigger Picture



Course Logistics

Course website:

- <https://cs170.org/>
- Hosts lecture slides and notes, class calendar, assigned reading from textbook.

Lectures

- Attendance is mandatory (more on this later)
- No livestream! COME TO LECTURES! Video recordings on bCourses.
- Textbook readings linked on course website

Homework

- Weekly HWs. **No grades. We will give feedback on the solutions.**



→ We highly recommend you do them to keep up with the class.

→ HW Parties and office hours.

More Course Logistics

Attendance is mandatory and graded (newish this semester):

- We will track it at **random times** during lecture, maybe more than once.
- You can miss ~~3~~₄ lectures with no consequences.

In-class Quizzes: (new this semester) **No alternate exams offered.**

- **Three graded in-class quizzes** about a week before each exam.
- Content drawn mainly from HW and Discussions.
- Giving you an early feedback on your learning and preparation for the exams.

Exams: 2 midterms and 1 final. **No alternate exams offered.**

Midterm 1 on Oct 1, Midterm 2 on Nov 5. Evening hours.

Final: Dec 15

Even More Course Logistics

Discussion Sections

- Schedule TBD: Check the “Discussions” tab under the website
- **Discussions don’t replace lectures:** We assume you have already attended the lecture and reviewed the material before coming to the discussion.

Contact us or each others

- Ed: Announcements and forum
- Email: cs170@Berkeley.edu for admins and logistics.

Even More ...

Office hours (See the schedule under the calendar tab)

- Nika's OH: After lecture on Thursdays she teaches.
→ meet at the class entrance walk to Gateway **B1040 Bear**.
- John's OH: TBD
- Staff OH: see calendar

Group meetings with the staff:

- You will sign up for check in with staff.
- We want to ensure you meet them!

Other resources and forms

Course Policies:

- Course policies and etiquettes will be listed on the website.
 - Academic Honesty code strictly enforced, ...
- Read them and adhere to them.

Feedback!

- Help us improve the class!
- Send us suggestions on Ed or in person.
- We will set up a midsemester anonymous feedback form.

A good way to learn in this course

Lectures:

- **GO TO LECTURES!** Ask questions and remain engaged in class.
 - Attendance is mandatory because we believe it plays an important role in your learning and engagement with the material!
- Review the slides and questions after the lecture, before attempting the homework.
- **Do the homeworks to keep up with the class.** Since they aren't graded for points (just for feedback) no temptation to look the answers up.

Assigned reading:

- Read before or soon after class. Don't leave until the exam time.

Discussion section:

- Attempt the discussion problems **before the session.** Attend!

Little Break + Attendance

Log into iClicker:

<https://join.iclicker.com/ASAN>

Check-in window will close in 5
minutes (end of break)



Scan for iClicker

Algorithms!

“Algorithms”

Muḥammad ibn Mūsā al-Khwārizmī or **al-Khwarizmi**, was Persian polymath from Khwarazm (today's Uzbekistan and Turkmenistan).

Was a scholar in Baghdad contributed to Math, Astronomy, and Geography.

In Latin, al-Khwarizmi's name gave rise to “algorithm”.

His books spread the Hindu-Arabic numeral system to Europe.




Hindu-Arabic Numeral System

Roman numerals not in any natural basis. Hard to do arithmetic.

How big is my plot of land?

$$\text{XXIX} \times \text{XXXVII} = ?$$

$$\begin{array}{r} \overset{26}{29} \\ \times \overset{\cancel{10} \cancel{10} \cancel{10}}{37} \\ \hline + \quad 203 \\ \quad 870 \\ \hline 1073 \end{array}$$

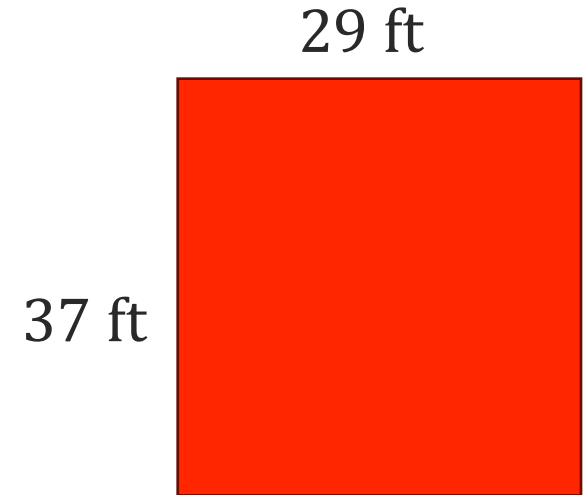

Let's go back to elementary school


How do we add integers?

Discuss

How fast is the grade-school addition algorithm?

More formal: How many one-digit operations does it take?

n digits

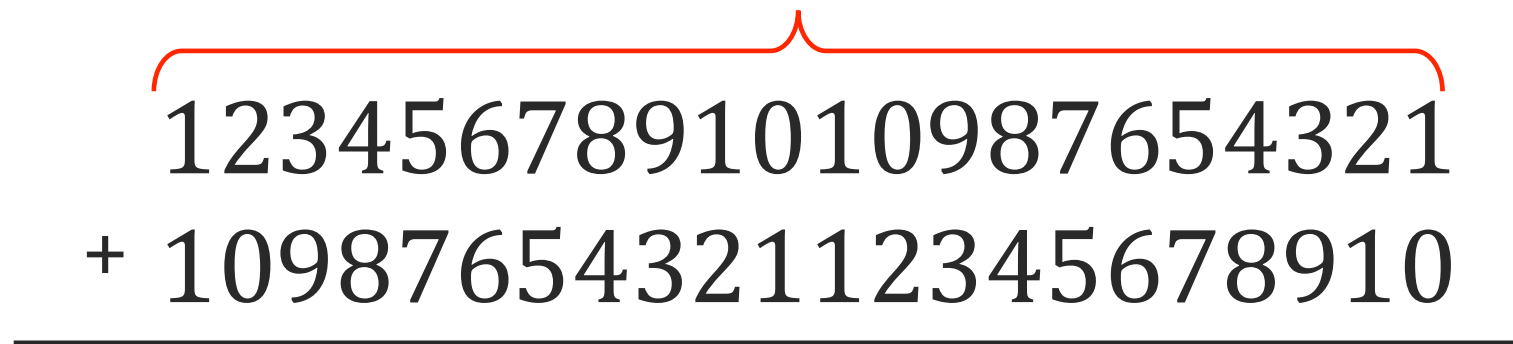
$$\begin{array}{r} 1234567891010987654321 \\ + 1098765432112345678910 \\ \hline \end{array}$$

$$\begin{array}{r} 12345 \\ + 78910 \\ \hline \end{array}$$

About n one-digit operations

Well ... there are also at most n carries, but that makes it still something like $2n$, maybe $3n$

Big-Oh Notation


Recall $O(\cdot)$ notation from 61B!!

Asymptotic Behavior

In most cases, we care only about asymptotic behavior, i.e. what happens for very large N .

- Simulation of billions of interacting particles.
- Social network with billions of users.
- Logging of billions of transactions.
- Encoding of billions of bytes of video data.

Algorithms which scale well (e.g. look like lines) have better asymptotic runtime behavior than algorithms that scale relatively poorly (e.g. look like parabolas).

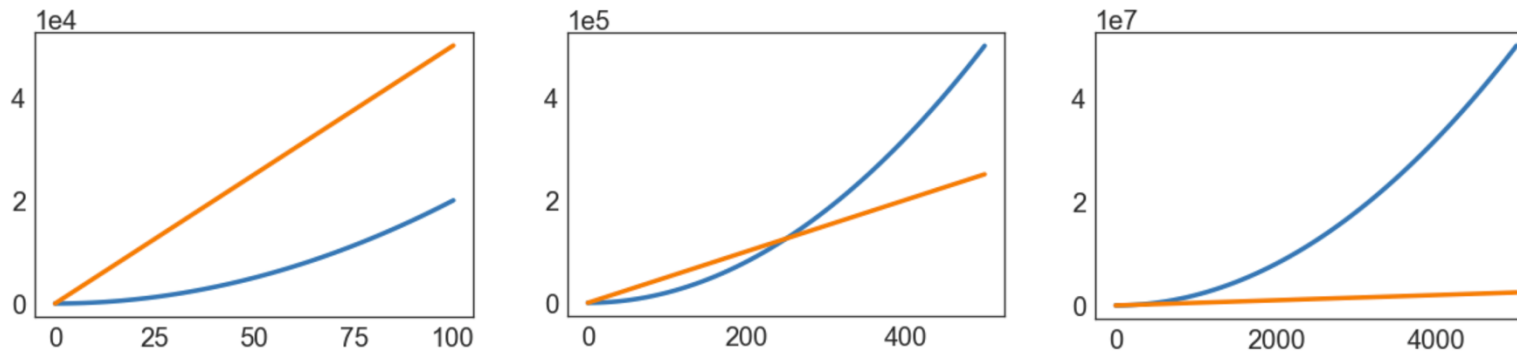

$$R(N) \in O(f(N))$$

means there exists positive constants k_2 such that:

$$R(N) \leq k_2 \cdot f(N)$$

for all values of N greater than some N_0 .

 i.e. very large N

Big-Oh Notation

Recall $O(\cdot)$ notation from 61B!

- Ignore constants and focus on the largest dependence on n .

We say that addition of 2 numbers with n digits
“runs in time $O(n)$ ”



Still don't remember $O(\cdot)$ notation well?

- We'll dig deeper more formally next time. Also GO TO SECTIONS!

What about multiplication?

Discuss

How fast is grade school integer multiplication?

n digits



1234567891010987654321
x 1098765432112345678910



It runs in time $O(n^2)$!

Well ... there are at most n^2 1-digit multiplications, at most n^2 carries to be added, and then we have to add n numbers, each with at most $2n$ digits

Can we do better?

Easier question: Can we do better than $O(n)$?

- No! It takes at least n steps to just read the numbers.

One other fun algorithm for multiplications:

27 x 19		
1	13	38 ←
0	6	76
1	3	152 ←
1	1	304 ←
0	0	608
		513

Egyptian multiplication / Russian Peasant Algorithm

- ✓ Repeat: Halve 1st number (floor) and double the second number, until we get 0 in the first column.
- Remove any rows where the first column is even.
- Add all remaining rows.




At home, prove why this algorithm is correct and what its runtime is.

There is a way to do better!

- **Karatsuba** (1960): $O(n^{1.6})$ We'll see this algorithm!
- **Toom-3/Toom-Cook** (1963): $O(n^{1.465})$
Uses the same technical tool as Karatsuba's.
- **Schönhage–Strassen** (1971):
 - Runs in time $O(n \log(n) \log \log(n))$
- **Furer** (2007)
 - Runs in time $n \log(n) \cdot 2^{O(\log^*(n))}$
- **Harvey and van der Hoeven** (2019)
 - Runs in time $O(n \log(n))$

Divide and Conquer

Breaking up a big problem into smaller subproblems, recursively.

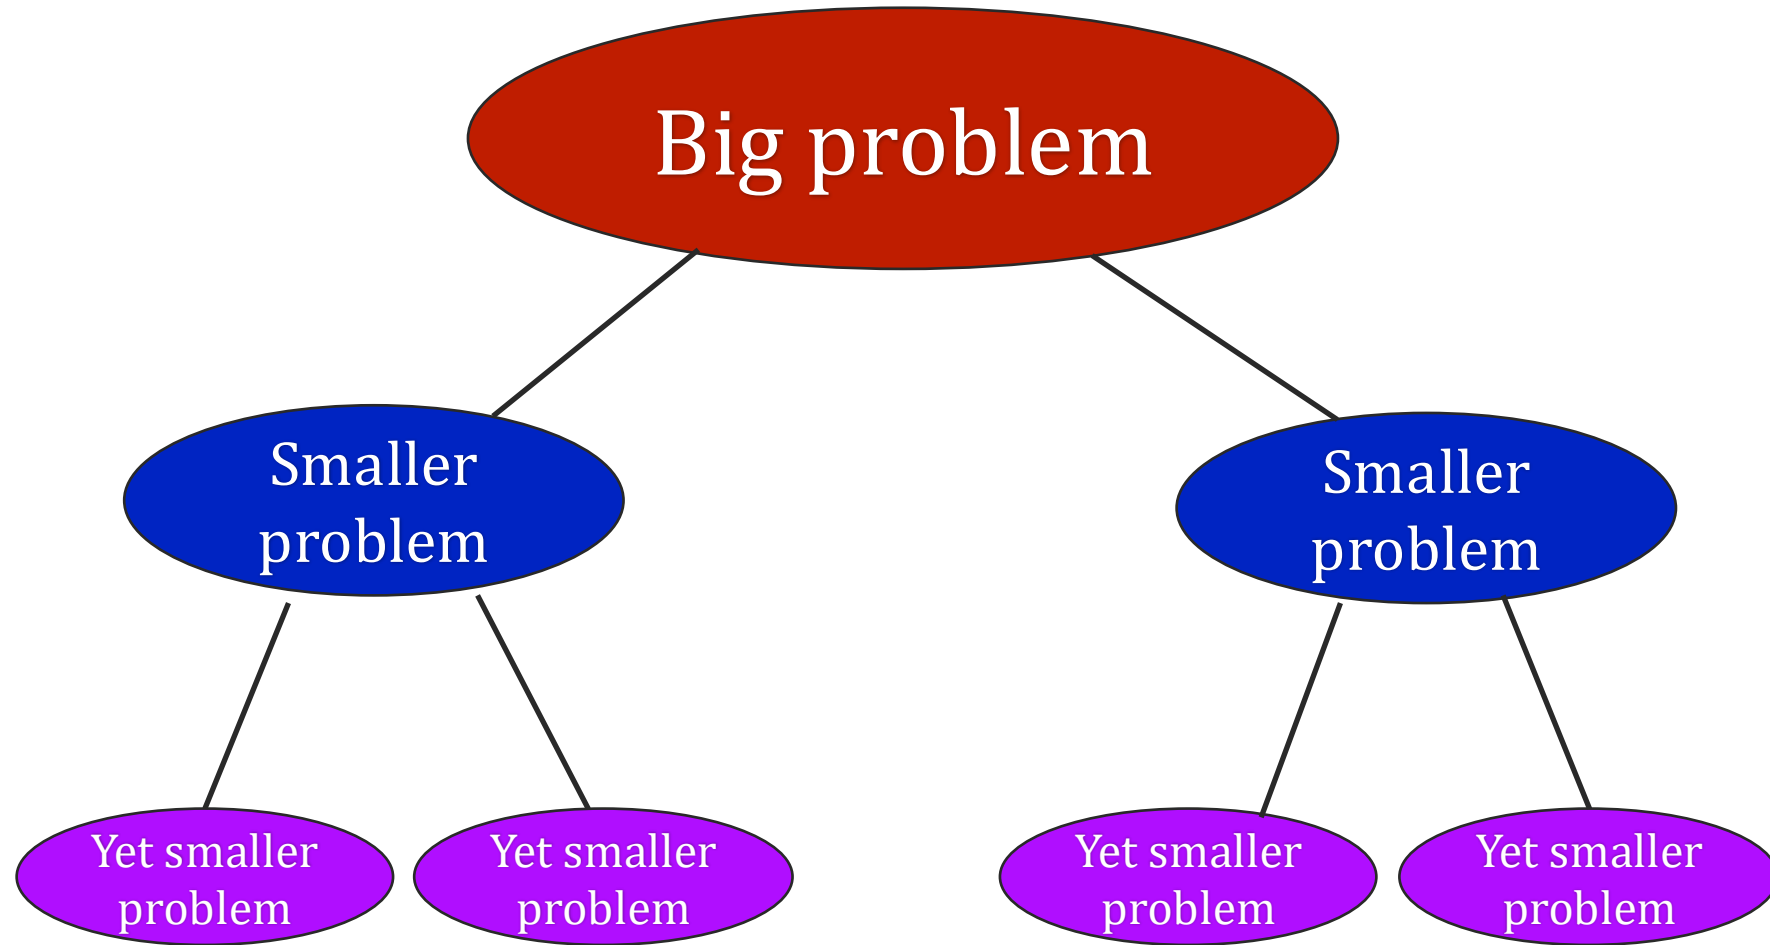

Divide and Conquer for Multiplication

Break up the multiplication of two integers with n digits into multiplication of integers with $n/2$ digits:

$$\underline{1234} = 12 \times 100 + 34$$

$$\begin{aligned} 1234 \times 5678 &= (\underline{12} \times 100 + 34) \times (\underline{56} \times 100 + 78) \\ &= \underbrace{(12 \times 56)}_{\textcircled{1}} \times 10^4 + \underbrace{(12 \times 78)}_{\textcircled{2}} + \underbrace{(34 \times 56)}_{\textcircled{3}} \times 10^2 + \underbrace{(34 \times 78)}_{\textcircled{4}} \end{aligned}$$

One 4-digit multiplication $\longrightarrow$ Four 2-digit multiplications

(simplify: assume even n)

The algorithm

Break up the multiplication of two integers with n digits into multiplication of integers with $n/2$ digits:

(simplify: assume even n)

The algorithm

Break up the multiplication of two integers with n digits into multiplication of integers with $n/2$ digits:

$$[x_1 x_2 \cdots x_n] = \overbrace{[x_1, x_2, \cdots, x_{n/2}]}^a \times 10^{\frac{n}{2}} + \overbrace{[x_{n/2+1} x_{n/2+2} \cdots x_n]}^b$$

$$[y_1 y_2 \cdots y_n] = \overbrace{[y_1, y_2, \cdots, y_{n/2}]}^c \times 10^{\frac{n}{2}} + \overbrace{[y_{n/2+1} y_{n/2+2} \cdots y_n]}^d$$

$$x \times y = (a \times 10^{\frac{n}{2}} + b)(c \times 10^{\frac{n}{2}} + d)$$

$$= \underbrace{(a \times c)}_{P1} 10^n + \underbrace{(a \times d)}_{P2} + \underbrace{(c \times b)}_{P3} 10^{n/2} + \underbrace{(b \times d)}_{P4}$$

One n -digit multiplication



Four $n/2$ -digit multiplications

Multiply two 4-digit Numbers

$$1234 \times 5678$$

We broke 1 multiplication of 4-digit numbers to 4 multiplications of 2-digit numbers.

We wanted to count 1-digit operations. So, what should we do now?


Recurse!

Break up each of the 2-digit multiplication problems, to 4 multiplications with 1-digit numbers.



Write the pseudo-code, handling corner cases and odd *ns* too.

Recursion tree for 4-digit numbers

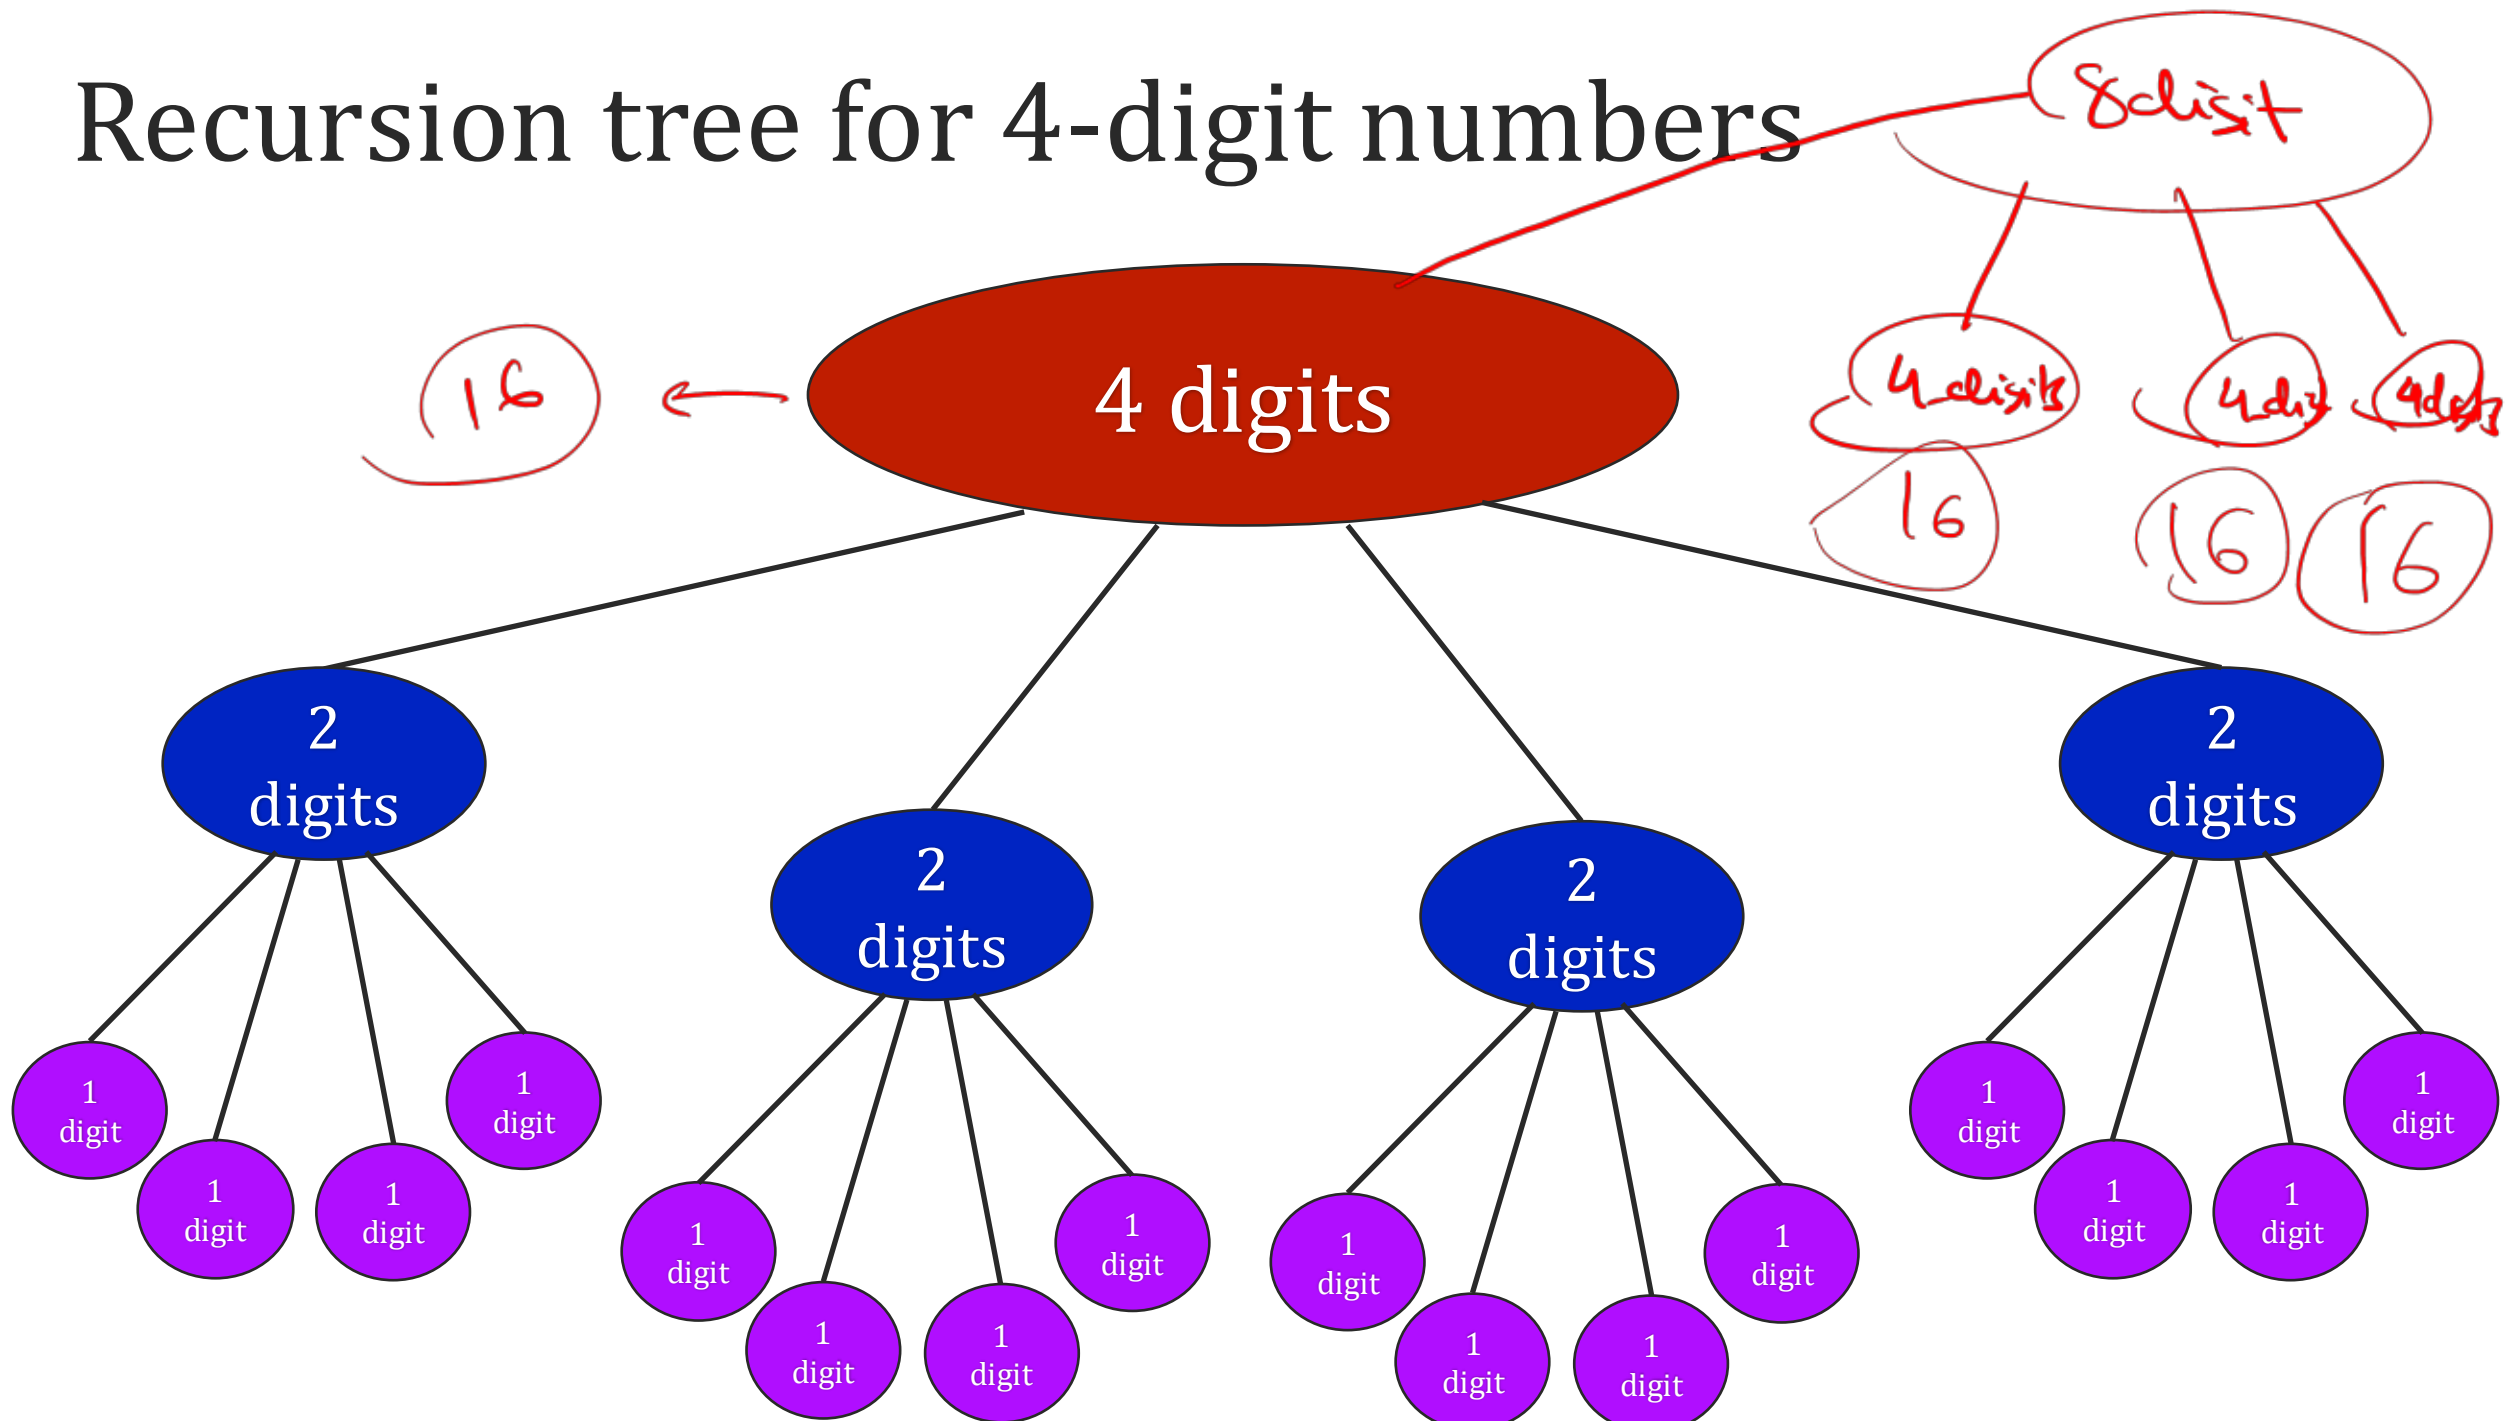

What is the running time of this algorithm?

We saw that multiplying two 4-digit numbers resulted in 16 one-digit multiplications.

- How many one-digit multiplications for multiplying two 8-digit numbers?
- What about multiplying n -digit numbers?


Running time of the algorithm

Claim: The runtime of the algorithm is $O(n^2)$.

Claim: We are creating $O(n^2)$ number of 1-digit operations.

$$\frac{n}{2^T} = 1 \Rightarrow T = \log_2(n)$$

$$4^T = 4^{\log_2(n)} = n^{\log_2(4)} = n^2$$

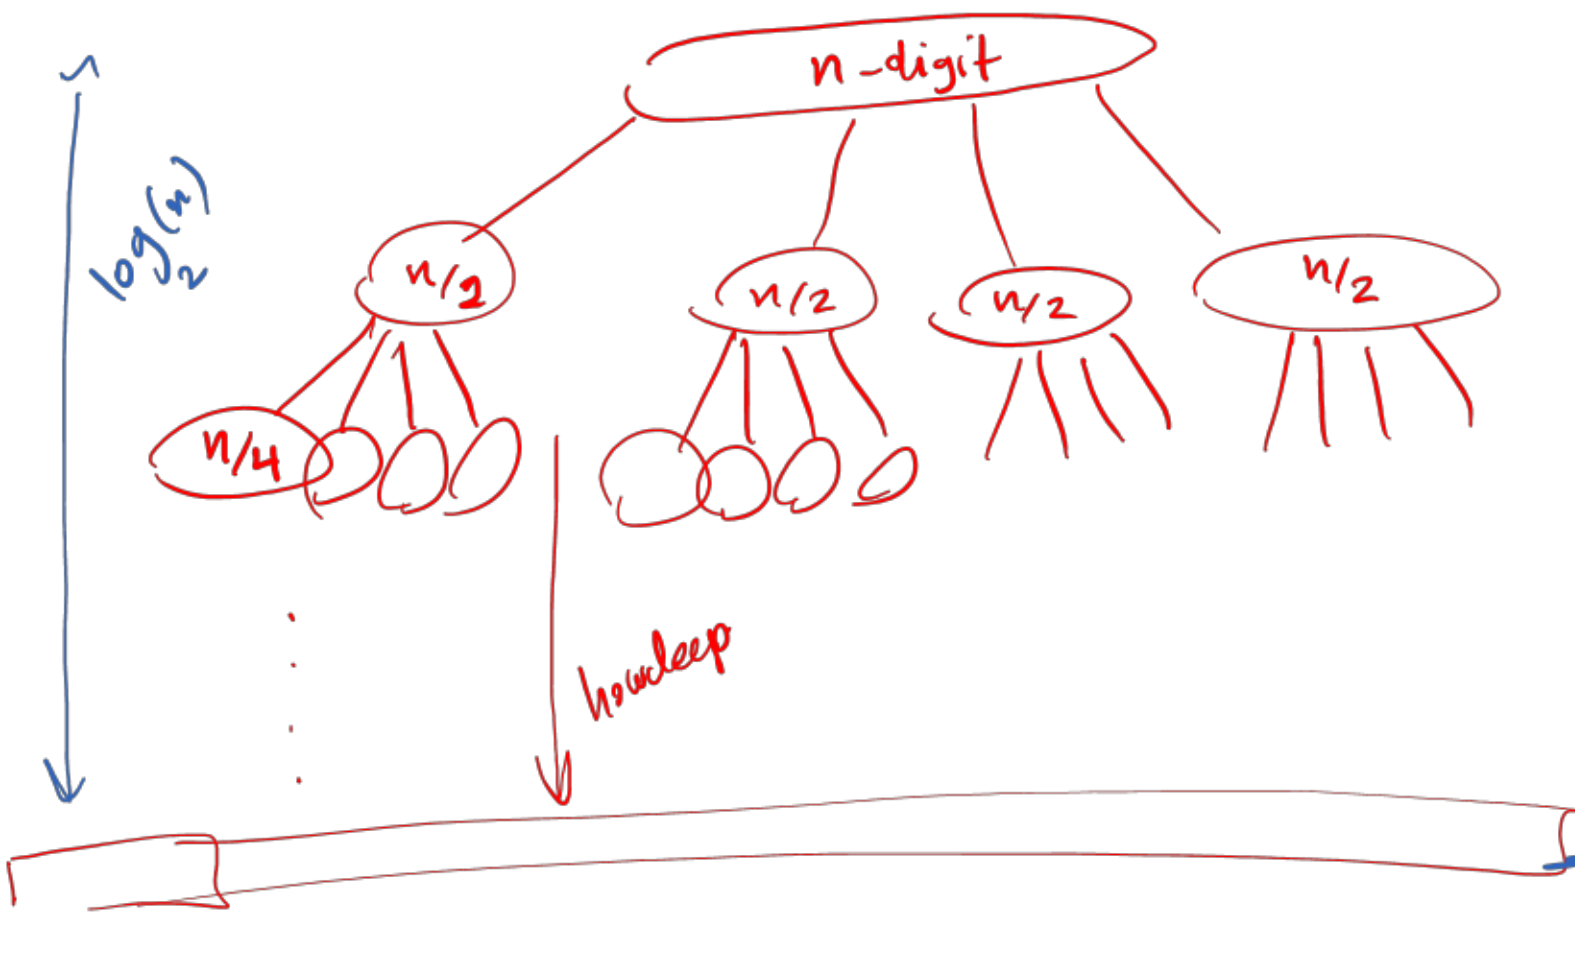

layer	size of prob # digits	# nodes.
0	n	1
1	$n/2$	4
2	$n/4$	16
$\vdots$		
t	$n/2^t$	4^t
T	$\frac{n}{2^T} = 1$	?

So, was there a point to Divide and Conquer?

Karatsuba's Clever Trick

Divide and Conquer indeed can lead to a faster algorithm!

$$\begin{aligned}x \times y &= (a \times 10^{\frac{n}{2}} + b)(c \times 10^{\frac{n}{2}} + d) \\&= \underbrace{(a \times c)}_{\text{P1}} 10^n + \underbrace{(a \times d + c \times b)}_{\text{P2} + \text{P3}} 10^{n/2} + \underbrace{(b \times d)}_{\text{P4}}\end{aligned}$$

The issue is that we are creating 4 sub-problems.
What if we could create fewer subproblems?



Main idea: Could we write **P2+P3** using what we compute in **P1** and **P4**, and at most one other $n/2$ -digit multiplication?

Karatsuba's Clever Trick

Let us only compute 3 things:

- Q1: $a \times c$
- Q2: $b \times d$
- Q3: $(a + b)(c + d)$

$$P_2 + P_3 = ad + cb$$

Expressing P2+P3 differently


$$a \times d + c \times b = (a + b)(c + d) - ac - bd$$

$$Q_3 - Q_1 - Q_2$$

Three subproblems

$$\begin{aligned} x \times y &= (a \times 10^{\frac{n}{2}} + b)(c \times 10^{\frac{n}{2}} + d) \\ &= \underbrace{(a \times c)}_{Q1} 10^n + \underbrace{(a \times d + c \times b)}_{Q3 - Q1 - Q2} 10^{n/2} + \underbrace{(b \times d)}_{Q2} \end{aligned}$$

What is the running time of Karatsuba's Alg?

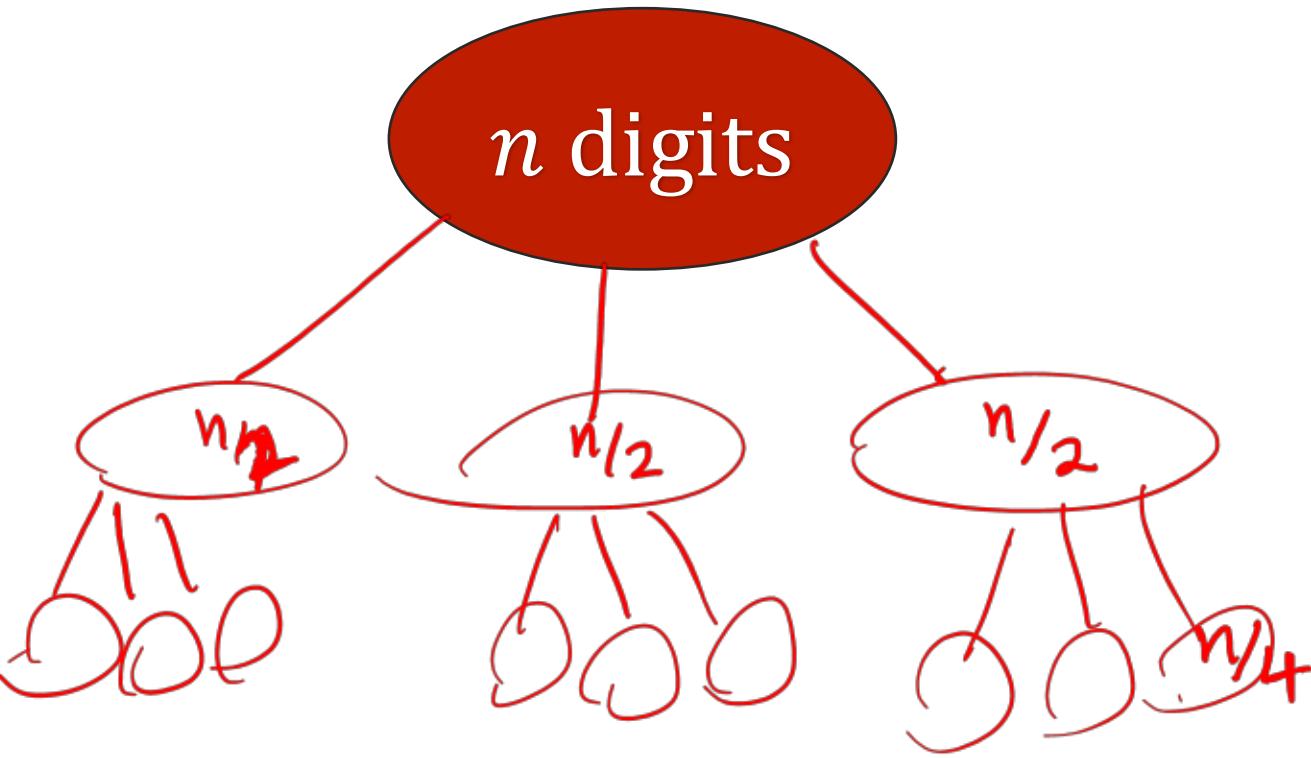

Layer	# of digits	# problems
0	n	1
1	$n/2$	$\boxed{\times 3}$ 3
2	$n/4$	$\boxed{\times 3}$ 9
$\vdots$		
t	$n/2^t$	3^t

Details we are skipping

Technically

- We only counted the number of 1-digit problems
- There are other things we do: adding, subtracting, ...
- Shouldn't we account for all of that?

Absolutely!

- We should be more formal, and we will be a bit more formal next time.
- In this case, additions/subtractions end up in lower order terms
- Don't affect $O(\cdot)$.